

# M-8076 ASTM F2413-18

## Classical Wedge Work Boots (SBP SRC)

Traditional Lace-Up Wedge Work Boots is made with Brown Smooth Cow Leather and Goodyear Welted EVA Outsole. It is approved by SGS Lab with USA ASTM F2413-18 Standard.



Upper : High Quality Smooth Cow Leather

Lining : Breathable Sandwich Air Mesh

Insole : Comfortable EVA Coated Mesh

Outsole : Goodyear Welted EVA Sole

Toecap : Steel Toecap

Penetration : Steel Midsole Plate

Size : EU 37-47#, UK 3-13#, US4-14#

ASTM F2413-18 M I/75 C/75 PR EH

Application : Construction, Logistics, Mechanics, Glasses Installation, Workshop, Oil & Gas, Chemical Factory etc



200 JOULE  
TOECAP



SLIP-  
RESISTANT



SHOCK  
ABSORPTION



ELECTRIC  
HAZARD 18KV



ANTI-NAIL  
MIDSOLE



PETROL AND  
CHEMICAL  
RESISTANT



WATER  
RESISTANT



OIL  
RESISTANT



### Steel Toecap Protection • AN1-EN12568 & ASTM F2412

Stainless steel toe cap can reach 200 joules from falling or rolling objects. It is stronger than iron toe cap.



### Steel Midsole Plate Protection • AN1-EN12568 & ASTM F2412

Steel midsole plate, is zero-penetration resistant. It can resist 1100 newtons nail puncture from sharp objects. It is stronger and more flexible than normal iron plate.



### Water Resistant Cow Leather Upper • CE EN ISO 20345:2011

High quality smooth cow leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. Tear strength is required 10% higher than Europe test requirement, to reach longer lifespan.




### Light Weight EVA Outsole • CE EN ISO 20345:2011

The outsole is made by light weight EVA material, with traditional goodyear welted technology. The thread is sewn by hands with top quality. EVA sole is soft and light weight.

## Sole Bonding Strength Test

- EN ISO 20344:2011, 5.2 (Between Upper & Sole)
- Average Test Result  $5.8 \pm 5$  (N/mm)

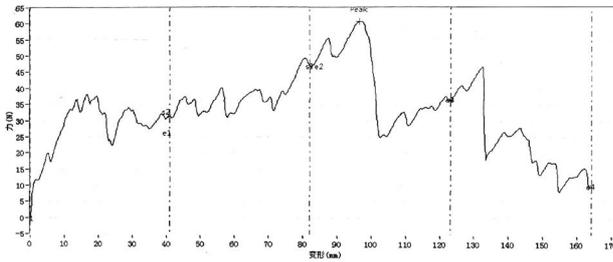

### Upper, Lining & Bonding Strength Test Result

Leather Tear Strength $\geq$	120.0 Newtons
Leather Tensile Properties $\geq$	15.0 N/mm <sup>2</sup>
Lining Tear Strength $\geq$	15.0 N/mm
Bonding Strength $\geq$	4.0 N/mm

✓ Protection With Slip Resistant (SRC)	Result
Test Requirement : SRA (Eurotile 2+Nal S) Forward Heel Slip $\geq 0.28$ & Forward Flat Slip: $\geq 0.32$ SRB (Steel Floor+Glycerine) Forward Heel Slip $\geq 0.13$ & Forward Flat Slip: $\geq 0.18$	PASS
Standards : EN ISO20344:2011(5.11) , SRC Means both SRA & SRB requirements are fulfilled.	
✓ Protection Against Electric Hazard (EH 18KV)	Result
Test Requirement : Test Voltage 18KV, Test Period 1 Minute, Leakage Current $\leq 1.0\text{mA}$	PASS
Standards : ASTM F2412-18a, Clause 9	
✓ Protection Resistant to Fuel Oil	Result
Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*)	PASS
Standards : EN ISO 20344:2011(8.6.1)	
SAFETOE Standard Package Instruction (Average 42# for Reference)	
Shoes Weight : 1.2-1.3 KGS /Pair	Carton Weight : 13-14 KGS /Carton
1 Pair / Color Box , Dimensions : 32×24×12CM	10 Pair / Carton , Dimensions : 62×50×33CM



### User Instructions:

- 1.) RECOMMENDED TO USE : Construction, Logistics, Mechanics, Glasses Installation, Workshop, Farming, Garden, Oil & Gas, Chemical Factory.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

- 4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.
- 5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.